Nesa 📰

4I67 PC/104-PLUS --> DUAL MINI PCI III ADAPTER


- PC/104-PLUS to Dual Mini PCI
- 2 Year warranty
- Local 3.3V regulator for Mini PCI
- Occupies only 1 PC/104-PLUS SLOT
- 4l67 can use slots 0-3
- Universal (5V or 3.3V BUS)
- Connector for LED status signals
- Supports routing of second interrupt
- Made in USA Local support



The 4I67 is a dual type III Mini-PCI adapter for the PC/104-PLUS bus The 4I67 allows use of 2 Mini-PCI cards like IEEE 802.11 wireless LAN cards in a PC/104-PLUS system.

The 4I67 uses a PCI bus bridge so that only one PC/104-PLUS 'slot' is required. The PCI bridge also isolates the Mini-PCI cards from the system, allowing MiniPCI cards to be used in systems with 5V busses. On card jumpers are used to select which PC104-PLUS slot the 4I67 occupies. Status LEDs are provided for the Mini-PCI slots, plus a connector is available for external LEDs. A local regulator supplies 3.3V power to the Mini-PCI slots. A 10 pin 2mm connector allows access to the LED status indicator signals.

An optional PC/104 feed-through connector allows the 4I67 to be used in system with mixed PC/104 and PC/104-PLUS busses.

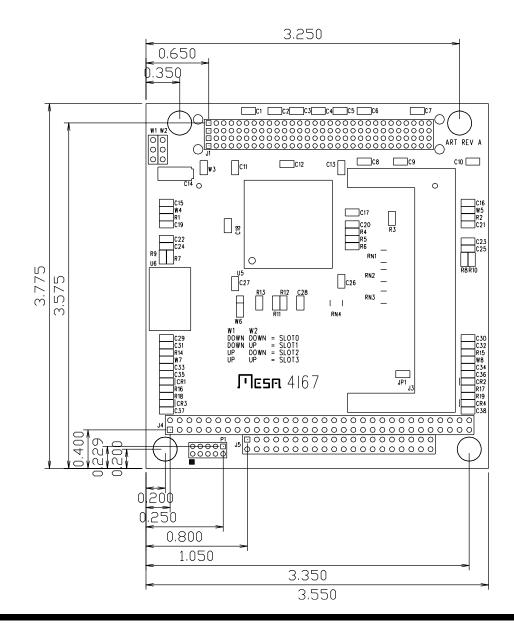

ORDERING INFORMATION:

p version. (0 +70C) with PC/104 feed-through
version (-40 +85C) with PC/104 feed-through
p version. (0 +70C) with PC/104 feed-through
version (-40 +85C) with PC/104 feed-through